


HERU 160 T EC



- NEW! Controlled by the HERU IQ app via Bluetooth or cloud service (use of Cloud service requires internet connection to the HERU).
- Wireless touch display as accessory.
- Wall-mounted model with top connection.
- Designed for supply and exhaust air ventilation with energy recovery.
- Suitable for installation in apartments, small houses, offices and other premises where there are stringent requirements on the indoor environment.
- High temperature efficiency, low energy consumption (SFP), low sound level, high operating reliability and provides clean indoor air.
- Unique design minimizes all thermal bridges.
- Integrated Modbus communication. No accessories needed.
- Easy installation wizard.
- Scheduled operation.
- Integrated control for preheater.
- Supports use of presence sensors.
- Airflow is generated by two silent radial fans with EC motors and impellers with backward curved blades.
- The fans are connected using quick connectors and are very easy to remove for cleaning.
- A regenerative, non hygroscopic, aluminum rotating heat exchanger located in the center of the unit. The heat exchanger can easily be removed for cleaning.
- Delivered with panel filter ISO ePM1 50% as standard, for both exhaust and supply air. The filters are very easy to change.
- Integrated controls for heating/cooling. Increases thermal comfort by heat recovery or night cooling.
- Integrated electric heater.
- The interior of the unit is constructed of galvanized steel sheet. The exterior is made of powder coated galvanized steel sheet.
- 50 mm insulation in sides, top, bottom and door. 30 mm insulation in the back of the unit.
- For placement in warm or cold areas.
- Available in either right-hand or left-hand design.
- HERU 100T and HERU 160T has a connection for a cooker hood. This connection is routed past the rotor to prevent cooking odours from spreading back into the premises.
- HERU 100T and HERU 160T are equipped with wall plug.
- Integrated silencer on the supply air and extract air side.

NOTE! The warranty of HERU is only valid if accessories/equipment (e.g. filters) from H. Östberg AB are used.


DIAGRAMS - SUPPLY

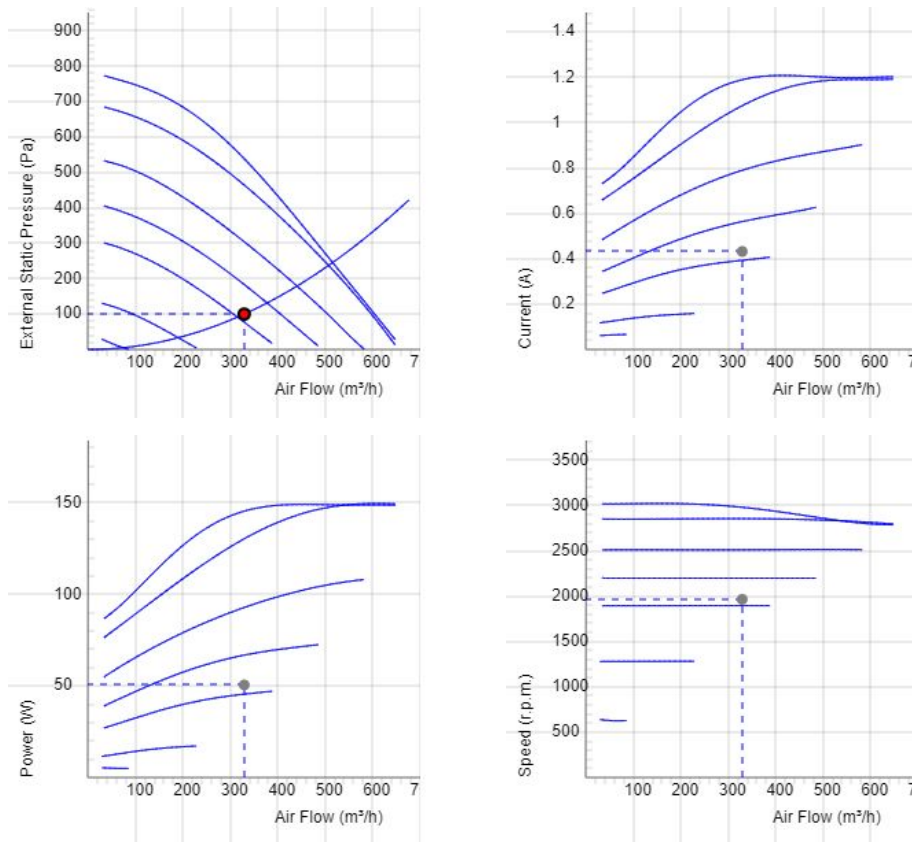

Data - SUPPLY

Air Flow (m³/h) 329	External static pressure (Pa) 100	Power (W) 50.5	Speed (r.p.m.) 1965	Current (A) 0.432	Voltage (V) 6.23
------------------------	--------------------------------------	-------------------	------------------------	----------------------	---------------------



DIAGRAMS - EXTRACT

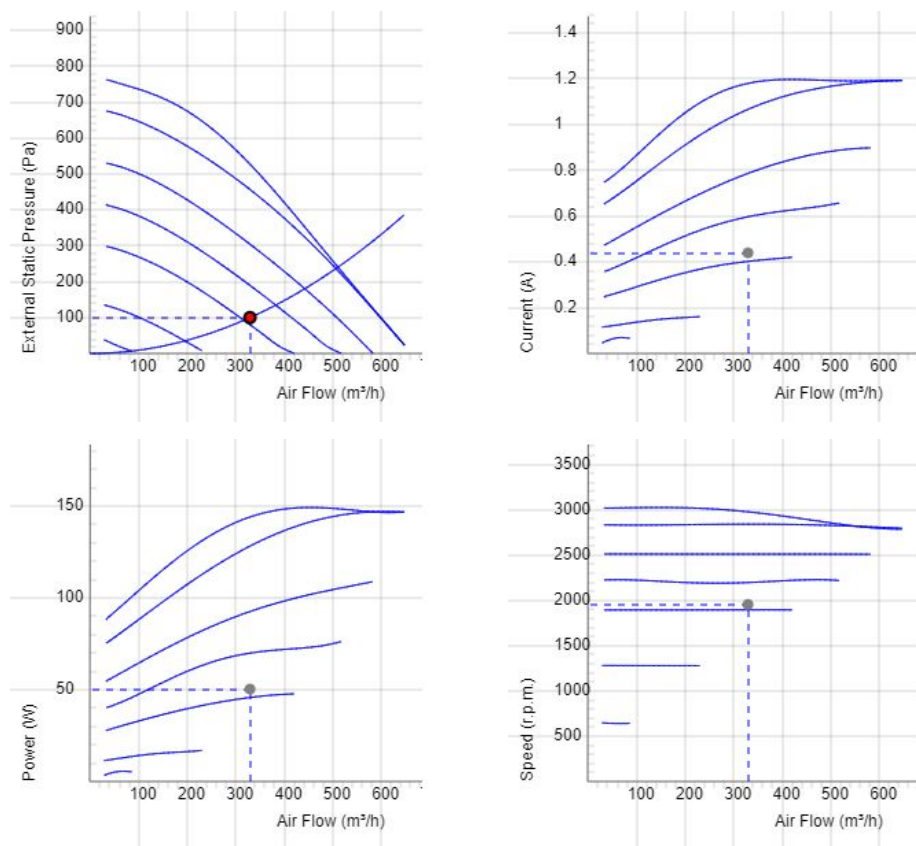

Data - EXTRACT

Air Flow (m³/h) 329	External static pressure (Pa) 100	Power (W) 50.3	Speed (r.p.m.) 1956	Current (A) 0.44	Voltage (V) 6.19
------------------------	--------------------------------------	-------------------	------------------------	---------------------	---------------------

DIAGRAMS - COMBINED

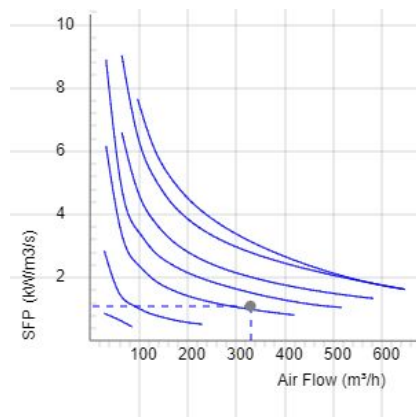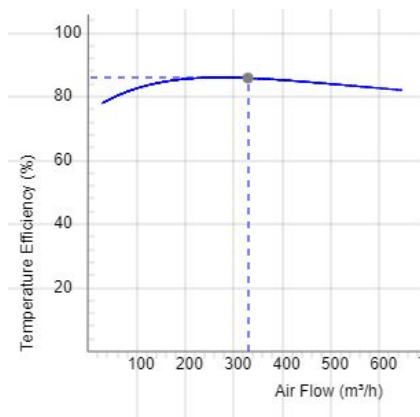


DATA COMBINED

Efficiency (%)
85.9

SFPv (kW/m³/s)
1.1

SOUND DATA

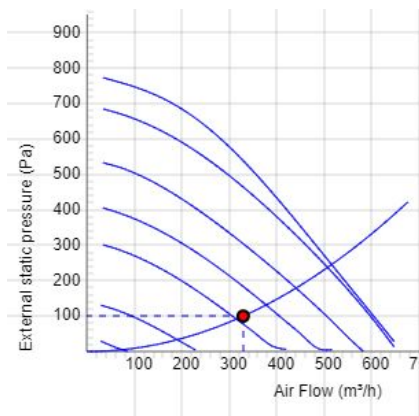

	Tot	63	125	250	500	1k	2k	4k	8k
Supply Lw dB(A)	61	47	51	60	52	44	44	32	21
Extract Lw dB(A)	51	42	40	49	42	40	33	21	13
Surrounding Lw dB(A)	41	32	33	38	26	27	24	26	26
Surrounding Lp dB (A) 20m² Sabine, hemispherical 3m	34								

Data - SOUND

Air Flow (m³/h) 329	External static pressure (Pa) 100	Power (W) 50.5	Speed (r.p.m.) 1965	Current (A) 0.432	Efficiency (%) 85.9	SFPv (kW/m³/s) 1.1	Voltage (V) 6.23
------------------------	--------------------------------------	-------------------	------------------------	----------------------	------------------------	-----------------------	---------------------

TECHNICAL DATA

Parameter	HERU 160 T EC-y2 RE 8010834		HERU 160 T EC-y2 LE 8010835	
	Value	Unit	Value	Unit
Voltage	230	V	230	V
Phase	1	~	1	~
Frequency	50	Hz	50	Hz
Power	2020	W	2020	W
Power, fans	300	W	300	W
Power, heater	1700	W	1700	W
Current	9.9	A	9.9	A
Current, fans	2.40	A	2.40	A
Current, heater	7.39	A	7.39	A
Speed	2860	r.p.m.	2860	r.p.m.
Sound pressure level at 3 m	38	dB(A)	38	dB(A)
Weight	95	kg	95	kg
Weight (empty casing)	55	kg	55	kg
Enclosure class	41	IP	41	IP
Duct connection	160	mm	160	mm
Max. flow @ 0Pa	658.80184464517	m ³ /h	658.80184464517	m ³ /h
Max. pressure	789	Pa	789	Pa
Voltage range	220-240	V	220-240	V



PRODUCT INFORMATION SHEET

Parameter	Value	Unit
(a) Manufacturer	Östberg	-
(b) Model code	HERU 160 T EC	-
(c) SEC average climate	-41.4	kWh/m ²
SEC average climate, class	A	-
SEC warm climate	-16.3	kWh/m ²
SEC warm climate, class	E	-
SEC cold climate	-85.3	kWh/m ²
SEC cold climate, class	A+	-
(d) Declared type	RVU / BVU	-
(e) Type of drive	Variable speed drive	-
(f) Type of heat recovery	Regenerative	-
(g) Thermal efficiency	85	%
(h) Max. flow rate (@100Pa)	605	m ³ /h
(i) Power at max. flow rate	298	W
(j) Sound power level	42	dB LwA
(k) Reference flow rate	0.118	m ³ /s
(l) Reference pressure difference	50	Pa
(m) SPI	0.34	W/(m ³ /h)
(n) Type of control/ctrl factor	Local demand control(accessory)/0.65	-
(o) External (and internal) leakage rate	1.99 (3,99)	%
(p) Mixing rate	N/A	-
(q) Visual filter warning	In remote control	-
(r) Instruction supply/exhaust grilles	See manual	-
(s) Disassembly instructions	fsp.ostberg.com	-
(t) Airflow sensitivity	N/A	-
(u) Air tightness	N/A	m/s
(v) AEC	178	kWh



Parameter	Value	Unit
(w) AHS average	4590	kWh
AHS warmer	2075	kWh
AHS colder	8979	kWh

DIMENSIONS

RIGHT-HAND DESIGN with cooker hood connection
(mm)

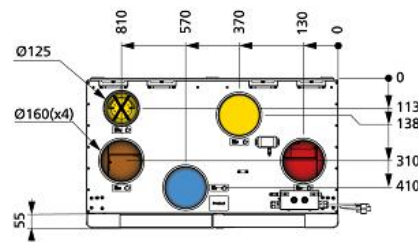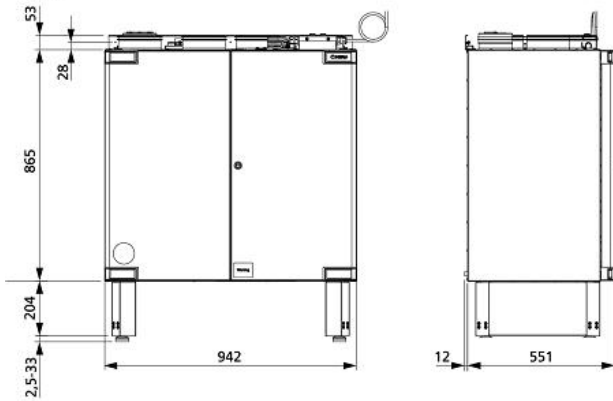

LEFT-HAND DESIGN with cooker hood connection

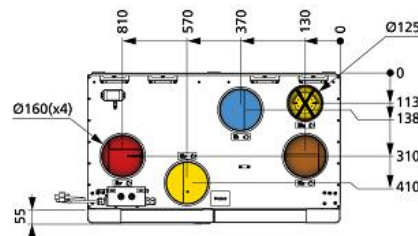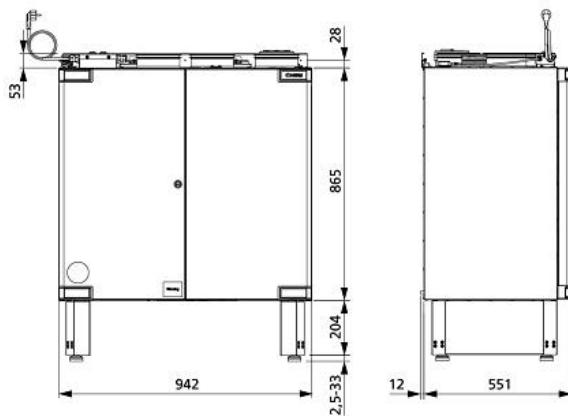

ENGLISH

- Supply air
- Extract air
- Exhaust air
- Fresh air
- ⊗ Cooker hood

SVENSKA

- Tilluft
- Frånluft
- Avluft
- Uteluft
- ⊗ Spiskåpa

NORSKA

- Tilluft
- Avtrekk
- Avkast
- Luftinntak
- ⊗ Kjøkkenhette

SUOMI

- Tuloilma
- Poistoilma
- Jäteilma
- Ulkoilma
- ⊗ Liesituuletin

DEUTSCH

- Zuluft
- Abluft
- Fortluft
- Frischluft
- ⊗ Dunstabzugshaube

POLSKI


- Powietrze nawiew
- Powietrze wywiew
- Powietrze usuwane
- powietrze z zewnątrz
- ⊗ Okapu kuchennego

ITALIANO

- Aria di immissione
- Aria di estrazione
- Sfiato
- Aria di esterna
- ⊗ Cappa cucina

ACCESSORIES

Electrical accessories

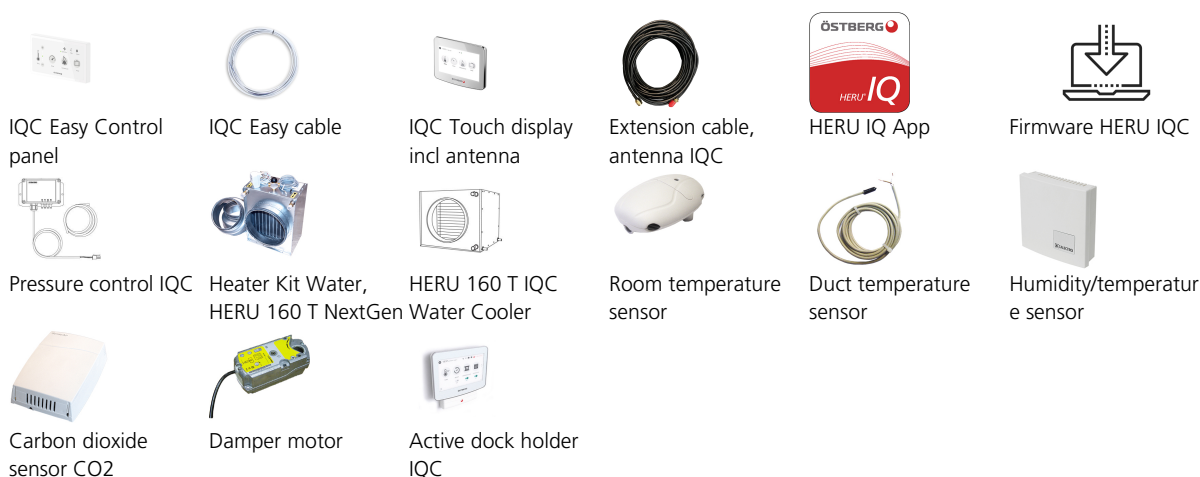

Mechanical accessories



SPARE PARTS



Fan kit 160 T/S EC NG



Service kit rotor 160 T/S EC NG



Rotor motor 100-160 V-belt 160 T/S EC NG



Rotor kit (excl motor) 160 T/S EC NG



Electric heater 160 T EC NG



Absorber rotor motor EC NG



Pulley v-belt EC NG



IQC Touch display



IQC relay board EC NG



IQC antenna EC NG



IQC charger EC NG



IQC wall mount EC NG